




**YT-600 / YT-800 / YT-1000
YT-1200 / YT-1600**

擴大機

1. 5CH 麥克風輸入，1CH AUX 輸入，音量獨立調整控制。
2. 具高/低阻抗輸出。
3. 具 $\phi 6.3\text{m/m}$ 非平衡式混合輸入插座。
4. 外部輸入具 3 組梅花端子插座。
5. 附 LED VU 指示燈。
6. MIC 1 具有優先廣播功能並能自動切斷外接音源。
7. 具有高/低音音質控制。

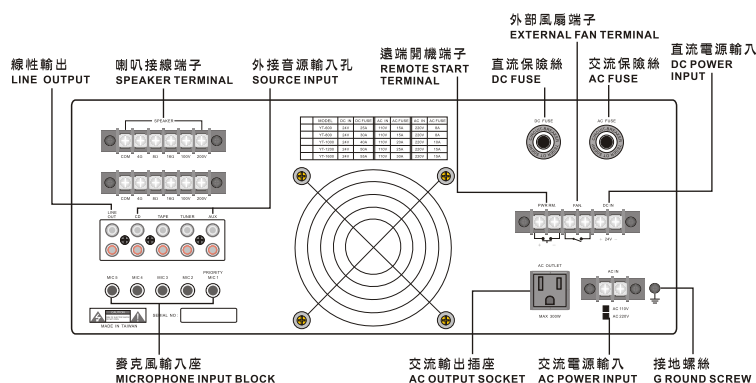

Amplifier


1. With 5CH MIC input, 1CH AUX input ; individual volume control.
2. High impedance output and low impedance output.
3. Support mixing input plug that $\phi 6.3\text{m/m}$ unbalance.
4. External inputs including 3 RCA pin jacks.
5. Supplied LED VU indicator.
6. MIC 1 with broadcast priority and can automatic cut input source.
7. Two independent tone controls.



NA-1000DA

擴大機

1. 電話遙控廣播。
2. 模擬電信局48V局線電壓、功能、DTMF 解調。
3. 具液晶顯示幕與開關，可顯示音量值、高低音控制、機內溫度顯示及各項參數設定。
4. 具超載、短路、保護開關自動跳脫等保護功能。
5. 具有線路偵測故障及偵測負載瓦數之指示表。

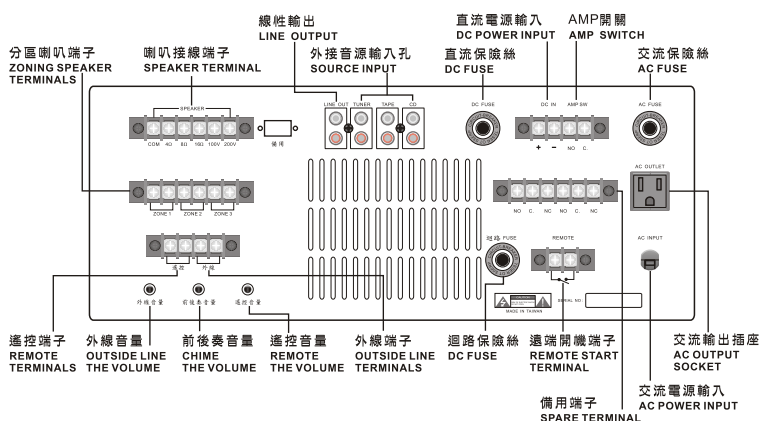

Amplifier

1. Phone remote broadcasts.
2. Analog Telecommunications Bureau 48V line voltage, function, DTMF demodulation.
3. With LCD screen and switches, can display the volume value, high bass control, the internal temperature display and various parameter settings.
4. With overload, short circuit protection switch automatically trip protection.
5. Has a line fault detection and detection of load wattage instruction sheet.

型號 Model	YT-600	YT-800	YT-1000	YT-1200	YT-1600	NA-1000DA
輸出功率 Rated Output Power	600W	800W	1000W	1200W	1600W	1000W
輸入 Input	MIC Input * 5CH 2mv-54dB at 10K Ω ; AUX Input * 1CH 90mv-22dB at 100K Ω . RCA terminal input * 3CH 100mv-30dB at 10K Ω .					MIC * 3CH AUX * 1CH
輸出阻抗 Output Impedance	Low impedance output 0, 4 Ω , 8 Ω , 16 Ω ; High impedance output 100V, 200V.					
輸出指示 Indication	LED Level Meter					
音質控制 Tone Control	Bass $\pm 10\text{dB}$ at 100Hz ; Treble $\pm 10\text{dB}$ at 10KHz					
線性輸出 Line Output	LINE OUT 500mv					
頻率響應 Frequency Response	25Hz ~ 18KHz $\pm 3\text{dB}$					
交流電源 AC Power Source	AC110V 50/60Hz					
直流電源 DC Power Source	DC24V					
雜音比 S/N Ratio	69dB					
重量 Weight	29.4kg	34.2kg	37.7kg	38.2kg	42.8kg	38kg
尺寸 Dimensions(mm)	483W * 402D * 178H					483W*450D* 178H